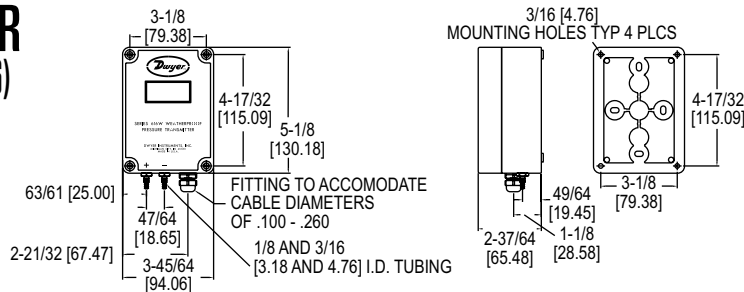


**SERIES 616WL**

# DIFFERENTIAL PRESSURE TRANSMITTER

## Low Ranges Down to 0.25 in w.c. (60 Pa), NEMA 4X Housing (IP66)

**CALIBRATION SERVICES AVAILABLE**


The **Series 616WL Differential Pressure Transmitter** senses very low pressures of air and non-combustible, compatible gases and sends a standard 4-20 mA output signal. All models, including those featuring the 3 digit LCD digital read-out, are factory calibrated to specific ranges as listed in the chart below. Positive, negative and differential pressures can be measured within a full span accuracy of  $\pm 0.50\%$ . This weatherproof unit is enclosed in a polycarbonate case, designed to meet (IP66/ NEMA 4X). Internal digital push-button zero and span allow for quick and simple field calibration.

**BENEFITS/FEATURES**

- NEMA 4X rated enclosure provides protection in harsh environments permitting outdoor monitoring or in areas where dust and particulate matter exists
- Easy to read LCD display provides immediate local alerts allowing corrective action to be taken quicker to eliminate the problem from becoming widespread
- Zero and span controls provides easy calibration checks and shorter installation time to get device running and monitoring
- High precision accuracy at low pressure ranges provides exceptional accuracy for insuring tight-control and minimizing costly out of specification conditions

**APPLICATIONS**

- Low pressure applications
- Dust collection
- Outdoor HVAC
- Roof-top equipment

MODEL CHART		
Model	Range	Max. Pressure
616WL-2-LCD	0 to 0.25 in w.c.	2 psig
616WL-4-LCD	0 to 1 in w.c.	4 psig
616WL-12-LCD	0 to $\pm 0.25$ in w.c.	2 psig
616WL-14-LCD	0 to $\pm 1$ in w.c.	4 psig
616WL-22-LCD	0 to 60 Pa	2 psig
616WL-32-LCD	0 to $\pm 60$ Pa	2 psig
616WL-25-LCD	0 to 250 Pa	4 psig
616WL-35-LCD	0 to $\pm 250$ Pa	4 psig

**SPECIFICATIONS**

**Service:** Air and non-combustible, compatible gases.  
**Wetted Materials:** Consult factory.  
**Accuracy:**  $\pm 0.50\%$  FS, display accuracy  $\pm 0.5\%$ .  
**Stability:**  $\pm 1\%$  FS/yr.  
**Temperature Limits:** 0 to 140°F (-17.8 to 60°C).  
**Compensated Temperature Limits:** 20 to 120°F (-6.67 to 48.9°C).  
**Pressure Limits:** See chart.  
**Thermal Effect:**  $\pm 0.02\%$  FS/°F (0.036% FS/°C).  
**Power Requirements:** 12-30 VDC (2-wire).  
**Output Signal:** 4-20 mA.

**Zero and Span Adjustments:** Digital, push-button adj.  
**Loop Resistance:** DC; 0 to 900  $\Omega$  max.  
**Current Consumption:** DC; 38 mA max.  
**Electrical Connections:** Screw-type terminal block.  
**Process Connections:** Barbed, dual size to fit 1/8" and 3/16" (3.12 and 4.76 mm) ID rubber or vinyl tubing.  
**Enclosure Rating:** NEMA 4X (IP66).  
**Mounting Orientation:** Vertical, consult factory for other position orientations.  
**Weight:** Without LCD 17 oz (482 g); with LCD 18 oz (510 g).  
**Compliance:** CE.

**OPTIONS**

To order add suffix:	Description
-NIST	NIST traceable calibration certificate
<b>Example:</b> 616WL-4-LCD-NIST	

Process Tubing Options: See page 453 (Gage Tubing Accessories)