




Model  
PM-2

# Digital Pen Meter with Phase Rotation

Measures DC/AC Voltage, Resistance, Continuity, Frequency and Phase Rotation

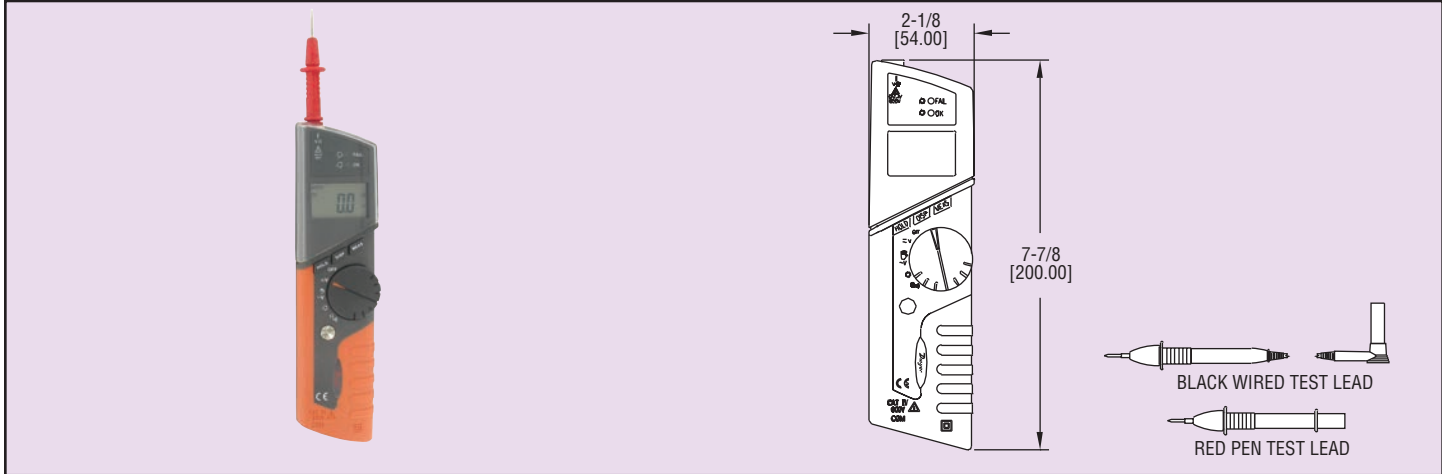

Our compact, low cost **Model PM-2 Digital Pen Meter** is ideal for general electrical testing and troubleshooting. A few applications include HVAC, automotive, electrical/power, and environmental monitoring uses. This meter measures DC and AC voltage to 600 V and resistance to 1499  $\Omega$ . In addition to volts and ohms, this meter includes continuity, diode, and frequency tests to 69.9 Hz. Along with the mentioned functions, the PM-2 has the ability to perform a phase test from 100 to 600 V. This meter features data hold, display (to show voltage and frequency during AC tests), and clear screen buttons. The 4 digit LCD features value, mode, and low battery indication. The Model PM-2 is furnished with red and black test leads, batteries and carrying case with belt clip.

**Model PM-2**, Digital Pen Meter with Phase Rotation

## SPECIFICATIONS

**Over Voltage Category:** CAT IV 600 V.

**AC Voltage:** 1.5 V to 600 V  $\pm$  (1.5% rdg + 5 dgt).

**DC Voltage:** 1.5 V to 600 V  $\pm$  (0.8% rdg + 1 dgt).

**Resistance:** 1 to 1499 ohm  $\pm$  (1.0% + 5 dgt).

**Continuity:** Audible buzzer.

**Phase Test:** 100 to 600 V.

**Frequency:** 0.1 Hz to 69.9 Hz  $\pm$  (1.0% + 2 dgt).

**Display:** 6000 counts plus decimal point.

**Power Requirements:** (2) AA alkaline batteries, included, user replaceable.

**Weight:** 5.3 oz (150 g).